




IMB30/IMBL30 INSTALLATION QUICK START GUIDE

READ THIS BEFORE INSTALLING YOUR IMB/IMBL BOUNDARY MICROPHONE.

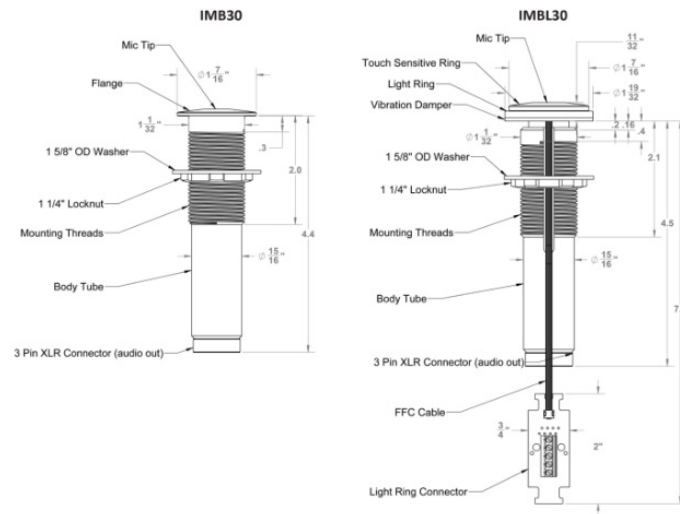

The IMB30 and IMBL30 boundary microphones are to be installed on a stiff surface such as a table, a ceiling, or a wall. The mounting hole is $\varnothing 11/16''$ (27 mm). The rubber vibration damper ring provides mechanical isolation from the mounting surface, and therefore offers effective sound isolation of the microphone. Do not overtighten the washer, as this reduces shock isolation.

For optimal sound quality, IMB30 or IMBL30 should be installed a minimum of 18 inches (45.72cm) from the edge of the table. The recommended range of angles for optimal sound quality is from 25° to 45°.

FOLLOW THESE STEPS TO INSTALL YOUR IMB/IMBL MICROPHONE:

1. Drill a 11/8" mounting hole through the tabletop.
2. Point the direction of the pick-up indicator toward the sound source.
3. Insert the LumiComm™ touch ring connector board and its FFC cable through the mounting hole, followed by the microphone's body.
4. Insert the LumiComm™ touch ring connector board through the washer and locknut before threading the locknut onto the microphone body.
5. Secure the LumiComm™ touch ring connector board to the microphone body using either tie wraps or velcro.
6. Install a RJ45 connector or connect wires to the Phoenix terminal for the LumiComm™ touch ring.
7. Install an XLR audio cable.

NOTICE: Never attempt to disconnect the LumiComm touch ring connector board from the FFC cable. This connector is glued in place at the factory.