

M30

Measurement Microphone

User's Guide



Electronic Calibration Files

Register your new measurement microphone within 30 days of purchase on our website at earthworksaudio.com/register.

Once your Measurement Microphone has been registered in our database, we will send you your ECF to the valid email address provided in your registration.

Warranty

All Earthworks microphones carry a limited warranty (parts and labor).

Product Registration

To help you get the most out of your Earthworks purchase, please take a moment and register your product with us online at earthworksaudio.com/register.

Service & Repair

If you have any problems with your Earthworks products, please contact our Service & Repair Department.

Email: returns@earthworksaudio.com

Telephone: (603) 654-2433, ext. 119

Description

The Earthworks M30 is an omnidirectional (pressure) microphone designed and calibrated for measurement purposes. It is a pre-polarized condenser microphone directly coupled to a wideband, low output impedance preamplifier. The M30 requires a standard 24-48V phantom power supply. It features a linear free-field frequency response from 3Hz to 30kHz (please see the enclosed individual calibration chart), very low handling noise, uniform polar pattern, and very high SPL handling capabilities. Its unique circuitry excludes the transconductance of the input FET from the overall gain structure. This means the sensitivity remains very stable when the microphone is subjected to variations in ambient temperature. The M30 meets or exceeds ANSI Type 1 requirements.

Each microphone is delivered with its own calibration chart providing its individually measured open-circuit sensitivity and the frequency response curve. A computer file containing the frequency response data for importing directly into measurement software is available from Earthworks, Inc. upon registering your new microphone. A mounting clip and a calibrator adapter are included with the microphone.

Applications

The Earthworks M30 is ideally suited for measurements including loudspeaker design and quality control, sound system setup and troubleshooting, room acoustics, or any application where an accurate free-field measurement microphone is required. Many test systems manufacturers, such as EAW Smaart™ and DEQX™, are recommending M30 microphones. The wide linear minimum-phase response and fast well-damped impulse response make the M30 an excellent microphone for loudspeaker design, especially for time domain measurements.

The M30 is simple to operate. Connect the microphone to a microphone preamplifier supplying 24-48V phantom power using a standard XLR microphone cable. Please allow up to one minute for the microphone to settle. Plugging in the microphone “hot” (phantom power already present at the input) will not damage the microphone, and is actually preferred for faster settling. For optimum results we recommend pointing the M30 toward the sound source.

This microphone has no removable parts.

Calibration


The microphone is calibrated at the factory at 1 kHz (independent of any frequency weighting). The sensitivity in mV/Pa is provided on the enclosed calibration chart. If on-site calibration is required, use the enclosed one-half inch standard calibration adapter.

NOTE: Earthworks recommends re-calibration every five (5) years.


Specifications

Frequency response: 3Hz to 30kHz $\pm 1/-3$ dB
 Polar Pattern: Omnidirectional
 Sensitivity: 34mV/Pa (Typical)
 Power Requirements: 24-48V Phantom, 10mA
 Peak Acoustic Input: 140dB SPL
 Output: XLR-3
 Minimum Load: 600Ω btw. pins 2 & 3
 Noise: 20dB, A equivalent
 Dimensions L x D: 229 x 22 mm (9 x .860 in.)
 Weight: 225g (.5lb)


Specifications are subject to change without notice.

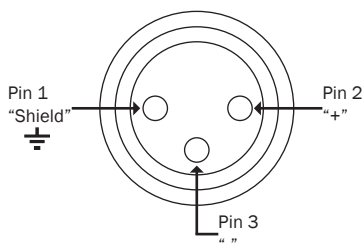


XLR Output Connector Assignment of M30

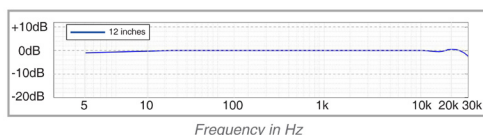

Frequency Response of M30 (typical)

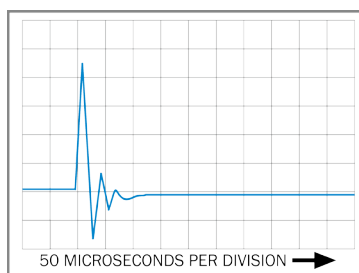

Impulse Response of M30 (typical)

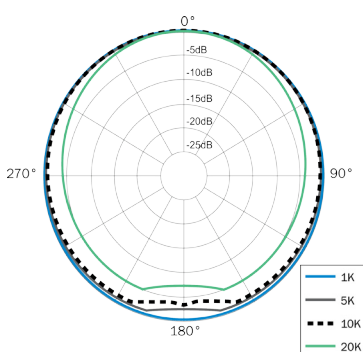

Polar Response of M30 (typical)