



# ICON PRO

**BROADCAST-QUALITY**

**XLR STREAMING MICROPHONE**

Follow us on social media @EarthworksAudio  
For more information, please visit  
[earthworksaudio.com](http://earthworksaudio.com) or call 1-603-654-2433.

EARTHWORKS AUDIO



# Thank you for purchasing the Earthworks ICON Pro Streaming Microphone

---

## **YOUR PURCHASE INCLUDES**

- 1 ICON Pro Microphone
- 1 Triad Orbit M2-R Mount
- 1 3/8" Thread Adapter

## **GETTING STARTED**

The ICON Pro is a condenser microphone with active electronics. This means:

- Its output level will be naturally higher than many of the dynamic microphones that it may be replacing. It is not uncommon to need to reduce gain if you were previously using a dynamic microphone.
- You will need to engage phantom power on your interface or preamp. Pro Tip: It's always a good idea to plug in a condenser microphone while phantom power is off and the channel is muted. After engaging phantom power, give the microphone a short time to settle before unmuting.

## **PROPER MAINTENANCE**

To guarantee your microphone provides years of performance, follow these guidelines:

- Avoid extreme heat and condensing humidity
- Rough handling may damage the microphone even if no markings are visible
- When not in use, keep the microphone in its case



## TROUBLESHOOTING

If you encounter issues while using your Earthworks Audio microphone, please make sure that:

- Your microphone is connected to an active power supply with phantom power on.
- Your microphone and XLR cable are well connected.
- The microphone is positioned at an appropriate distance from the sound source.
- External noise in your recording environment is kept to a minimum.
- Your recording space is at room temperature and free of dust.

If your issue persists after checking, please contact us via our website.

## SPECIFICATIONS

### Frequency Response

20Hz - 30kHz

### Min Output Load

600Ω between pins 2 & 3

### Polar Pattern

Cardioid

### Signal-to-Noise Ratio

79dB (A weighted)

### Sensitivity

20mV/Pa (-34dBV/Pa)

### Noise

16dB SPL (A weighted)

### Power Requirements

24-48v Phantom Power

### Dimensions L x D

5.137" x 1.6"

### Peak Acoustic Input

139dB SPL

### Weight



1.5lb (0.68kg)

### Output

XLR (pin 2+)

### Output Impedance

65Ω balanced (between pins 2 & 3)

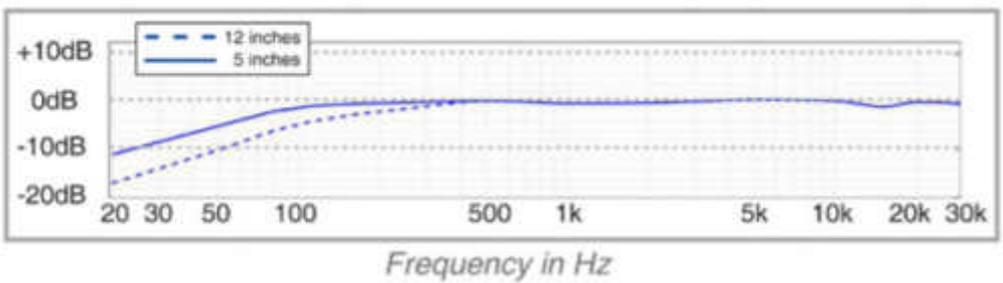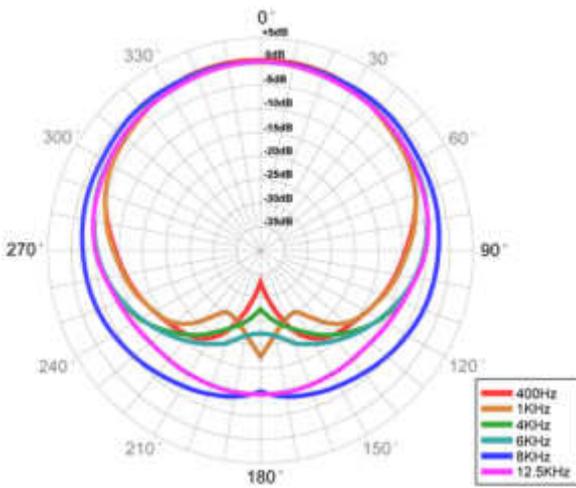

## WARRANTY

The ICON and ICON Pro carry a two-year limited warranty (parts and labor). Please register your warranty at: [earthworksaudio.com/register](https://earthworksaudio.com/register). If you have any problems with your Earthworks products, please contact our warranty/repair department by email at: [service@earthworksaudio.com](mailto:service@earthworksaudio.com)

## NOTE

This warranty only applies to Earthworks microphones purchased brand new. For microphones purchased/received second-hand, please contact us via our website.